


Planetary Gearhead GP 13 A $\varnothing 13$ mm, 0.2–0.35 Nm

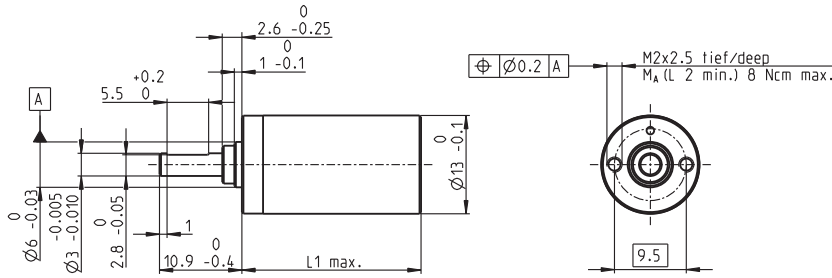

M 1:1

Technical Data

Planetary Gearhead	straight teeth
Output shaft	stainless steel, hardened
Bearing at output	sleeve bearing
Radial play, 6 mm from flange	max. 0.055 mm
Axial play	0.02–0.10 mm
Max. axial load (dynamic)	8 N
Max. force for press fits	100 N
Direction of rotation, drive to output	=
Max. continuous input speed	8000 rpm
Recommended temperature range	-40...+100°C
Number of stages	1 2 3 4 5
Max. radial load, 6 mm from flange	8 N 12 N 16 N 20 N 20 N

maxon gear

- Stock program
- Standard program
- Special program (on request)

Part Numbers

	110313	110314	110315	110316	110317
--	--------	--------	--------	--------	--------

Gearhead Data

1 Reduction	4.1:1	17:1	67:1	275:1	1119:1
2 Absolute reduction	57/14	3249/196	185193/2744	10556001/38416	601692057/537824
3 Max. motor shaft diameter	mm 1.5	1.5	1.5	1.5	1.5
Part Numbers					
1 Reduction	5.1:1	26:1	131:1	664:1	3373:1
2 Absolute reduction	66/13	4356/169	287496/2197	18974736/28561	1252332576/371293
3 Max. motor shaft diameter	mm 1.5	1.5	1.5	1.5	1.5
4 Number of stages	1	2	3	4	5
5 Max. continuous torque	Nm 0.20	0.20	0.30	0.30	0.35
6 Max. intermittent torque at gear output	Nm 0.30	0.30	0.45	0.45	0.53
7 Max. efficiency	% 91	83	75	69	62
8 Weight	g 11	14	17	20	23
9 Average backlash no load	° 1.0	1.2	1.5	1.8	2.0
10 Mass inertia	gcm ² 0.025	0.015	0.015	0.015	0.015
11 Gearhead length L1*	mm 16.0	19.9	23.7	27.6	31.4


* for A-max 12 and RE-max 13 L1 is + 0.3 mm



maxon Modular System

+ Motor	Page	+ Sensor/Brake	Page	Overall length [mm] = Motor length + gearhead length + (sensor/brake) + assembly parts				
RE 13	159/161			35.4	39.3	43.1	47.0	50.8
RE 13, 0.75 W	161	MR	385-387	42.5	46.4	50.2	54.1	57.9
RE 13, 0.75 W	161	MEnc 13	409	43.2	47.1	50.9	54.8	58.6
RE 13	163/165			47.6	51.5	55.3	59.2	63.0
RE 13, 2 W	165	MR	385-387	54.7	58.6	62.4	66.3	70.1
RE 13, 2 W	165	MEnc 13	409	55.4	59.3	63.1	67.0	70.8
RE 13, 1.5 W	167/169			38.5	42.4	46.2	50.1	53.9
RE 13, 1.5 W	169	MR	385-387	44.6	48.5	52.3	56.2	60.0
RE 13, 1.5 W	169	MEnc 13	409	46.5	50.4	54.2	58.1	61.9
RE 13, 3 W	171/173			50.7	54.6	58.4	62.3	66.1
RE 13, 3 W	173	MR	385-387	56.8	60.7	64.5	68.4	72.2
RE 13, 3 W	173	MEnc 13	409	58.7	62.6	66.4	70.3	74.1
A-max 12	191/192			37.6	41.5	45.3	49.2	53.0
A-max 12, 0.5 W	192	MR	385-387	41.7	45.6	49.4	53.3	57.1
RE-max 13	219/220			36.9	40.8	44.6	48.5	52.3
RE-max 13, 0.75 W	220	MR	385-387	41.6	45.5	49.3	53.2	57.0
RE-max 13	221/222			47.9	51.8	55.6	59.5	63.3
RE-max 13, 2 W	222	MR	385-387	52.6	56.5	60.3	64.2	68.0
EC 13, 6 W	240			37.4	41.3	45.1	49.0	52.8
EC 13, 12 W	241			49.6	53.5	57.3	61.2	65.0

Option Ball Bearing



Gearhead length: L1 + 0.2 mm

Part Numbers

4.1:1	144300	131:1	352393
5.1:1	352391	275:1	144303
17:1	144301	664:1	352394
26:1	352392	1119:1	144304
67:1	144302	3373:1	352395

Technical Data

Planetary Gearhead	straight teeth
Output shaft	stainless steel, hardened
Bearing at output	preloaded ball bearings
Radial play, 6 mm from flange	max. 0.04 mm
Axial play at axial load	< 5 N 0 mm
	> 5 N max. 0.04 mm
Max. axial load (dynamic)	8 N
Max. force for press fits	25 N
Direction of rotation, drive to output	=
Max. continuous input speed	8000 rpm
Recommended temperature range	-40...+100°C
Number of stages	1 2 3 4 5
Max. radial load, 6 mm from flange	10 N 15 N 20 N 25 N 25 N
Gearhead values according to sleeve bearing version	